

WALLPOD:EV MULTIMODE

FREE-TO-USE

Type 1 Or Type 2, Mode 3 Tethered Lead
c/w 13A Domestic Maintenance Socket

3.6kW Or 7.2kW

ROLEC EV

MANUFACTURED IN THE UK



The WALLPOD:EV MULTIMODE is a low-cost, entry level charging unit, designed to offer full Mode 3 fast charging to every Electric Vehicle (EV/PHEV) on the market today.

This unit also doubles up as an outdoor IP65 rated domestic 13amp maintenance socket ideal for home/garden maintenance.



Unit shown: WALLPOD:EV MULTIMODE
Tethered Type 1 Charging Unit

PRODUCT FEATURES

- IEC 61851-1 Mode 3 fast charging
- J1772 (Type 1) or IEC 62196 (Type 2) 5m tethered lead & lead holder
- Charging speeds - 3.6kW (16A) & 7.2kW (32A)
- IP65 rated 13A outdoor maintenance socket ideal for home/garden maintenance, charging mobility scooters and electric bikes, etc.
- Built-in overload and fault current protection (RCBO)
- Built-in LED charging status indicator
- Wall mounted charging gun holster
- Certificated by the BSI as safe to use in the domestic environment
- Easy to install and maintain
- IP65 Weatherproof & UV stabilised
- Corrosion resistant, fire retardant & impact resistant design
- CE certified



13amp Outdoor
Maintenance Socket



Safety in the
Home Certified



Colour Options
Available



IP65
Weather Proof



Flame
Retardant




UV
Stabilised

SPECIFICATIONS

PHYSICAL

Dimensions	179mm x 415.5mm x 142mm (W x H x D)
Standard Base Colour	Warm White (Other colours available upon request)
Standard Pod Colour	Green (Other colours available upon request)
Unit Material	Polycarbonate (303 EP-22)
Operating Temperature	-30°C to +50°C
Certifications & Compliances	BSI Certified - BS EN 60335-1 Wiring Regulations - BS 7671 (18th Edition) IET EV Regulations, Glow Wire Testing - IEC 60695-2-13 EMC Compliance - EN 61000-6-3:2007, EN 61000-6-2:2005 Safety Compliance - EN 60950-1:2006, EN 60950-22:2006, Low Voltage Directive (LVD) 2014/35/EU Environmental Protection - IP65 (Category 1) Weatherproof BS EN 60529, UL94 Flame Rating at V2 for 1.5mm and 3.0mm

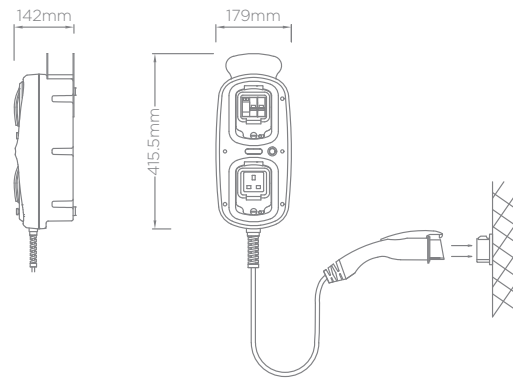


ELECTRICAL

Product Code	EVMM0010	EVMM0020	EVMM0030	EVMM0040
Charging Gun	J1772 (Type 1)		IEC 62196 (Type 2)	
Charging Cable Length	5m			
Rated Output	3.6kW	7.2kW	3.6kW	7.2kW
Rated Current	16A	32A	16A	32A
Charge Protocol	Mode 3			
EV Charging Compliance	EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002			
Input Voltage	230V AC/50Hz (Single Phase)			
Overload & Fault Current Protection	Built-in 30mA Type A RCBO & 6mA DC Sensitive Device			
	20A	40A	20A	40A
Additional Socket	13A domestic outdoor maintenance socket			
Overload Protection For 13A Socket	Built-in 16A MCB			
Incoming Cable Terminals	16mm earth			

OPTIONS & ACCESSORIES

- Key switch control charging
- Lockable door to switchgear
- Corporate branding (colours, logo badge, etc.)
- Amp-Selector key switch (switches between 16A or 32A)
- Charge-By-Solar switch (switches between 6A, 13A, 16A or 32A)
- Charge point signage



Images are for marketing purposes only and are not contractual © 2018



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

WPEVMMD-03
@RolecEV
www.rolecserv.com